

See discussions, stats, and author profiles for this publication at: <https://www.researchgate.net/publication/344665888>

Empirical Evaluation of V2G Round-trip Efficiency

Conference Paper · October 2020

DOI: 10.1109/SEST48500.2020.9203459

CITATIONS

0

READS

429

5 authors, including:



Wouter Schram

Utrecht University

16 PUBLICATIONS 111 CITATIONS

[SEE PROFILE](#)



Nico Brinkel

Utrecht University

6 PUBLICATIONS 21 CITATIONS

[SEE PROFILE](#)



Wilfried van Sark

Utrecht University

388 PUBLICATIONS 7,609 CITATIONS

[SEE PROFILE](#)

Some of the authors of this publication are also working on these related projects:



A System Perspective to the Deployment of Flexibility through Aggregator Companies [View project](#)



Energy Intranets (NEAT) [View project](#)

Empirical Evaluation of V2G Round-trip Efficiency

Wouter Schram*¹
Utrecht University
w.l.schram@uu.nl

Nico Brinkel¹
Utrecht University
n.b.g.brinkel@uu.nl

Gilbert Smink
ElaadNL
gilbertsmink@gmail.com

Thijs van Wijk
ElaadNL
thijs.van.wijk@elaad.nl

Wilfried van Sark
Utrecht University
w.g.j.h.m.vansark@uu.nl

Abstract—The business case of vehicle-to-grid (V2G) technology and its potential to provide grid services is heavily dependent on the round-trip efficiency of this technology. Surprisingly, very little empirical research is conducted to determine the V2G round-trip efficiency of electric vehicles currently available in the market, resulting in a wide range of efficiency values used in V2G modelling studies. This study aims to create more insight in the current V2G round-trip efficiency to stimulate that more uniform and realistic efficiency values are used in other studies. A field experiment is executed to measure the round-trip energy efficiency of V2G for different dates, current rates and average states of charge. It was found that the average round-trip efficiency (i.e., combined inverter and battery efficiency) when charging between a state of charge 25% and 75% with 3x16 Ampere was 87.0%. However, various external factors could influence the measured efficiencies, which had a total range from 79.1% to 87.8%. Charging at lower ambient temperatures and lower current rates had a statistically significant adverse effect on the round-trip efficiency. Efficiency at high and low state of charge was found to be marginally lower than around medium state of charges. Two different electric vehicle + charging station models were tested, one with on-board AC/DC converter, which is a novel V2G setup, and one with external AC/DC converter, rendering no statistically significant different efficiency values.

Index Terms—V2G, V2G efficiency, EV charging efficiency, electric vehicles, field experiment

I. INTRODUCTION

Vehicle-to-grid (V2G) technology is gaining prominence with increasing adoption of electric vehicles (EVs). The infeed of electricity from EV battery systems to the grid through V2G expands the opportunities of grid operators to stabilize the grid using EVs. It has been demonstrated that power quality and congestion problems in low-voltage grids can be mitigated using V2G [1], while V2G also can provide financial benefits as well as environmental benefits [2].

In recent years, multiple car models suitable for V2G have been introduced to the market (e.g., Nissan LEAF, Mitsubishi Outlander), while charging stations compatible for bidirectional charging are now also introduced to the streets [3]. The round-trip efficiency of V2G charging cycles is crucial for future adoption of V2G as it directly affects the business case and environmental impact of batteries in general, and of V2G specifically [4], [5].

This study was supported by the EU's ERDF in the project 'Smart Solar Charging regio Utrecht' and by the Dutch RVO in the project 'Slim laden met flexibele nettarieven (FLEET)'. The authors want to thank ElaadNL for allowing their EV testing lab to be used for this study and want to thank Bram van Eijsden for his contributions throughout the research process.

¹Both authors contributed equally to this work.

*Corresponding author

An overview of the used V2G round-trip efficiencies in a non-exhaustive list of model studies in Table I indicates that the ambiguity about the efficiency is high, as V2G round-trip efficiencies range from 55% to 100%. Surprisingly, the number of empirical evaluations of the V2G round-trip efficiency is low. Refs. [4], [6]–[8] arrived at round-trip efficiency values of between 53-70%, which is very low compared to the efficiency of stationary lithium-ion based battery systems. A single measurement was carried out in [9], arriving at a round-trip efficiency of 87%. However, this study did not consider the effect of e.g. State-of-Charge (SoC), current and temperature. A laboratory experiment in [10] arrived at a round-trip efficiency of 77%, but did not use an actual EV in determining this value. Refs. [11] and [12] arrived at efficiencies of around 80%, but only considered the efficiency of the charging station. The inconclusiveness on the value of the V2G round-trip efficiency among researchers is highlighted by the discussions in the following comment papers [4], [7]. Given the high importance of the V2G round-trip efficiency for future research, the current research presents a re-evaluation of the V2G round-trip efficiency in a field experiment setting, which resembles the natural environment of V2G. The V2G round-trip efficiency is evaluated for different dates, SoCs, charging currents and EV charging systems. Thereby this study includes a proof-of-concept of performing V2G using an on-board AC/DC converter.

The paper is outlined as follows: Section II presents the setup of the field experiment and describes the methods used to determine the round-trip efficiency. The results of the field experiments are presented in Section III. This is placed in a wider context in the Discussion in Section IV. Concluding remarks are presented in Section V.

TABLE I
NON-EXHAUSTIVE OVERVIEW OF USED V2G ROUND-TRIP EFFICIENCIES IN LITERATURE.

Efficiency	EV charging models
55%	[13]
72%	[14]
73%	[15], [16]
77%	[17]
81%	[1], [18]–[21]
84%	[22]
86%	[23]
87%	[24]
94%	[25]
100%	[26], [27]

II. METHODS

This study used two experimental setups considering two types of charging systems, as depicted in Fig. 1a and Fig. 1b. The first experimental setup considered a charging system with the AC/DC inverter inside the charging station. A Nissan LEAF (MY2018) was charged and discharged using the eNovates DC V2G 10 kW charging station. The second experimental setup considered a charging system with a AC/DC inverter on board of the EV, using a V2G prototype of the Renault ZOE and a WeDriveSolar v1.1. charging station with a Last Miles Solutions controller. This second setup is a novel approach, which means that this research also serves as a proof-of-concept of V2G technology using the AC/DC inverter on board of the EV.

The EV batteries in both systems reported the SoC of the EV on a two second basis. Multiple charging/discharging cycles were performed, which were based on the communicated SoC of the EV battery. In a charging/discharging cycle, an EV starts charging from the predetermined starting SoC until the predetermined final SoC is reached, after which it discharges until the starting SoC is reached again. Discharging is enforced by sending a computer signal to the Open Charge Point Interface Protocol (OCPI) protocol of the charging station to change the direction of the current. Fig. 2 illustrates the charging power and the SoC during one charging/discharging cycle. In both charging systems, power flows between the charging station and the AC grid were measured on a two second basis, at the measuring point depicted in Fig. 1a and Fig. 1b. The efficiency of one charging/discharging cycle was determined by taking the ratio between the energy exported from the charging station E_{out} and the energy fed into the charging station E_{in} in one charging/discharging cycle, as outlined in eq. (1). Hence, the losses consist of all conversion losses in the charging station and in the EV battery in a full charging/discharging cycle. E_{in} and E_{out} are determined considering the charging power over time (P_t), the duration of one timestep (Δt), the starting moment of charging at the starting SoC ($t_{SoCmin,start}$), the moment the final SoC is reached (t_{SoCmax}) and the moment the starting SoC is reached again ($t_{SoCmin,end}$).

$$\eta = \frac{E_{out}}{E_{in}} = \frac{-\sum_{t_{SoCmin,start}}^{t_{SoCmin,end}} P_t * \Delta t}{\sum_{t_{SoCmin,start}}^{t_{SoCmax}} P_t * \Delta t} \quad (1)$$

Note that the discharging power, in the numerator of (1), is negative by convention - as also visible in Fig. 2. Therefore, the minus sign is added to obtain a positive value for the efficiency.

III. RESULTS

Table II provides an overview of all performed tests and the average efficiency per experimental set-up. The measured efficiencies ranged from 79.1% to 87.8%. Highest efficiencies were found for the Nissan LEAF when charging and discharging at maximum current, namely 87.0%. However, various

external factors were found to have an impact on the efficiency, which will be discussed in the next sections.

A. Impact of Date on Efficiency

Fig. 3 illustrates a comparison between the test results of two tests: one performed on 23 April 2019 and one performed on 28 November 2019. Average efficiency of the former was 87.0%, whereas efficiency of the latter was 85.6%. Despite the small sample size (three and four cycles, respectively) this difference was statistically significant (two-sample t-test; $p < 0.05$).

Results could be explained by the difference in temperature between these two days; the average ambient temperature of the test performed on 23 April was 15.3°C, while the average of the tests performed on 28 November was 5.5°C. The decreased performance of EVs on cold days is a well-known factor in EV user experiences and EV modelling [28]. It is also in line with laboratory research performed on lithium-ion battery charging and discharging, which found higher heat generation (which indicates conversion losses) in the battery at low ambient temperatures than at high ambient temperatures [29].

B. Impact State of Charge on Efficiency

Fig. 4 illustrates the efficiencies of tests performed around an SoC of 15%, 50% and 85%. Results indicate that charging efficiency is higher for medium SoCs than for SoCs either on the low or high extremes (84.6% versus 83.7% and 83.0%, respectively). For low SoCs, this is in line with previous research on lithium-ion batteries; it was found that batteries exhibit higher internal resistance and heat generation at low SoCs for both charging and discharging [29].

However, differences are relatively small and statistically insignificant. This indicates that V2G can also be performed for low and high SoCs of the EV without considerably compromising the efficiency.

C. Impact Current on Efficiency

Fig. 5 illustrates the various efficiencies on full load and partial load. Partial load (3x8A) significantly reduces the round-trip efficiency of V2G (two-sample t-test, $p < 0.01$). Decreasing the current to 3x4A further decreases the efficiency.

These results are not in line with [29], who found that heat generation in batteries (which indicate losses) increase with increasing current. However, the C-rates (i.e. power-to-energy ratio) in that study were between 1 and 4, whereas C-rates were below 1 in our study, which makes results incomparable. Our results are in line with [6], who explain this finding by noting that EV chargers must be designed for a large range of charging conditions, but cannot be optimized for all these conditions.

D. Impact EV and Charging Station Type on Efficiency

Fig. 6 compares the efficiencies of the two tested charging systems. Results indicate that similar efficiencies can be obtained with different V2G configurations. As the AC/DC

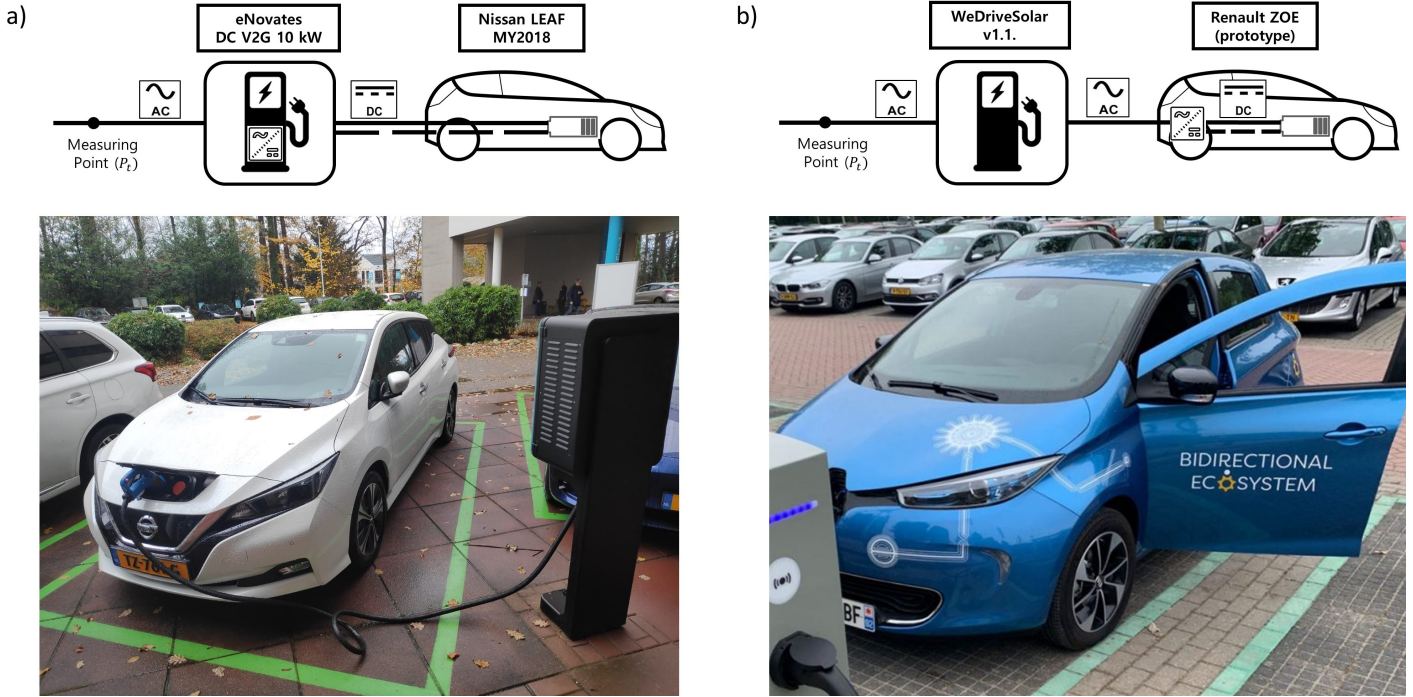


Fig. 1. a) Experimental setup of V2G measuring system with AC/DC inverter in the charging station, using a Nissan LEAF. Image of Nissan LEAF is taken at testing lab of ElaadNL. b) Experimental setup of V2G measuring system with AC/DC inverter onboard of the EV, using a Renault ZOE prototype. Image of Renault ZOE is a stock photo from Renault.

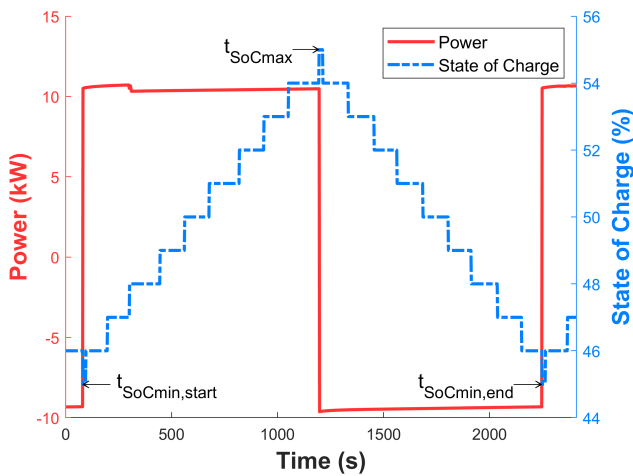


Fig. 2. One charging / discharging cycle, in this case between a SoC of 45% and 55%. The start and end times of a half cycle are indicated by $t_{SoCmin,start}$, t_{SoCmax} and $t_{SoCmin,end}$. Note that the EV only communicates integers, which explains the step-wise increase in SoC.

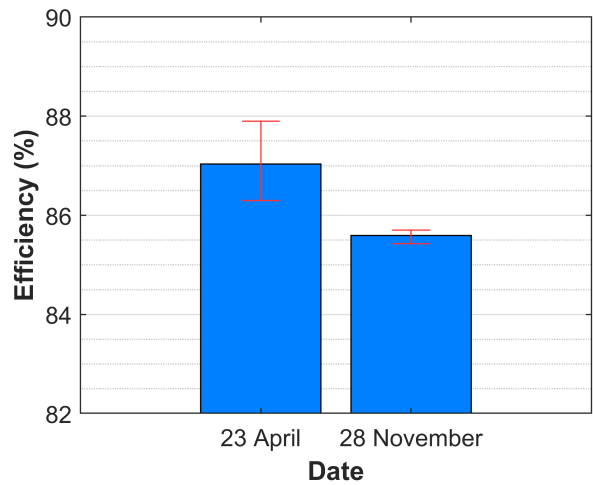


Fig. 3. Efficiencies of tests performed in spring and in late autumn, with SoC range 25% to 75%. Height of bars indicate the average of the tests; error bars indicate the minimum and maximum found efficiency within the tests.

converter of the Renault ZOE is still a prototype, better efficiencies can potentially be obtained with further development of the technology.

E. Charging and Discharging Power at Different SoCs

Fig. 7 illustrates the relationship between SoC and power for charging and discharging (V2G) of the Nissan LEAF. In general, power rates of charging are somewhat higher. This is because of the location of the measuring point, which is

TABLE II
OVERVIEW TEST RESULTS.

Start Time	End Time	Current	SoC limits	EV + EVSE	Number of cycles	Average Efficiency (AC-to-AC)
23/04/2019, 18:17	24/04/2019, 07:33	3x16A	25%-75%	Nissan LEAF + eNovates	4	87.0%
28/11/2019, 19:22	29/11/2019, 04:53	3x16A	25%-75%	Nissan LEAF + eNovates	3	85.6%
1/05/2019, 15:30	2/5/2019, 06:31	3x8A	30%-70%	Nissan LEAF + eNovates	3	84.6%
24/04/2019, 16:02	25/4/2019, 05:02	3x4A	25%-75%	Nissan LEAF + eNovates	1	79.2%
28/11/2019, 10:06	28/11/2019, 12:04	3x16A	80%-90%	Nissan LEAF + eNovates	3	83.0%
28/11/2019, 13:21	29/11/2019, 10:31	3x16A	45%-55%	Nissan LEAF + eNovates	3	84.6%
28/11/2019, 15:29	28/11/2019, 16:50	3x16A	11%-19%	Nissan LEAF + eNovates	3	83.7%
9/10/2019, 11:31	9/10/2019, 14:49	3x16A	25%-35%	Renault ZOE (prototype)	3	85.1%

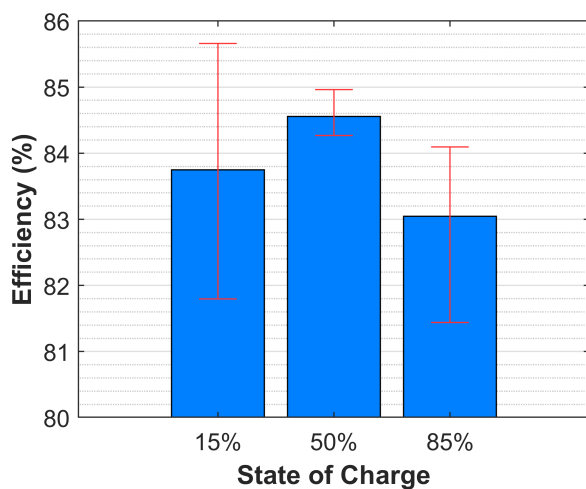


Fig. 4. Efficiency at different average SoCs, with SoC range of 11% to 19%, 45% to 55% and 80% to 90%. Height of bars indicate the average of the tests; error bars indicate the minimum and maximum found efficiency within the tests.

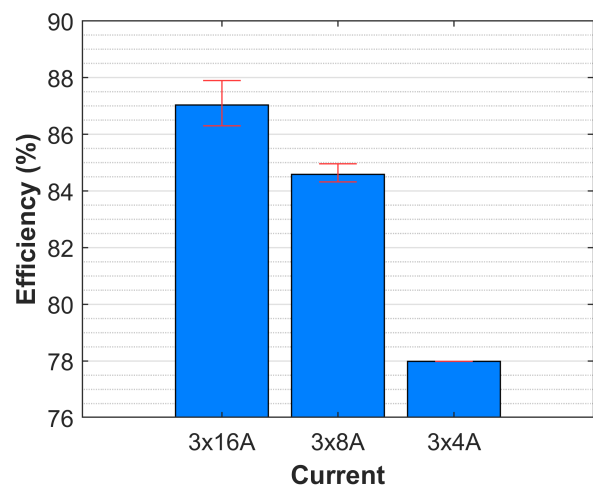


Fig. 5. Efficiencies of tests for different values of current, with SoC range of 25% to 75% for 3x16A and 3x4A and 30% to 70% for 3x8A.. Height of bars indicate the average of the tests; error bars indicate the minimum and maximum found efficiency within the tests. The test of 3x4A was performed only once, hence the non-existent error bar.

between the charging station and the AC grid. Hence, charging power rates are before conversion losses and discharging rates after conversion losses. What further stands out, is the jagged shape in the charging curve - despite the fact that the current signal that is sent to the charging station is constant. Apparently, either the charging station or the EV readjusts the voltage at specific SoCs. A possible explanation is that the EV some modules of the battery pack are charged consecutively instead of in parallel, however, the underlying reason is difficult to verify. The discharging curve follows the more well-known power curve of a battery, with higher voltages at higher SoCs [30].

IV. DISCUSSION

In total, the round-trip efficiency of 23 full V2G charging + discharging cycles was determined. An efficiency of 87% was found for charging the Nissan Leaf at 3x16A. This value

is in line with the values reported in [9], but substantially higher than the highest reported V2G round-trip efficiency in multiple other studies [4], [6], [10], [11]. The higher efficiency values measured in this study indicate that other studies assuming a considerably lower efficiency values might have underestimated the business case and potential to provide grid services of V2G.

Lower temperatures and partial load seem to have a negative impact on V2G round-trip efficiency. The considerably lower efficiency values with partial load has considerable implications for EV charging models. Where most EV charging models consider that the charging and discharging efficiency is independent of the charging load, this study indicated that this assumption is invalid. It is recommended that the dependency between charging current and charging efficiency is considered in future charging models.

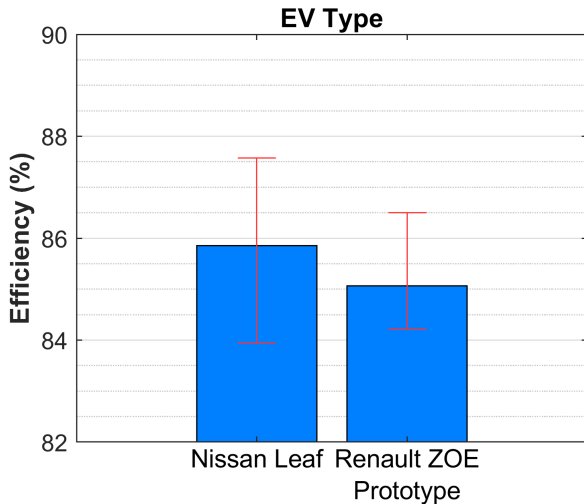


Fig. 6. Efficiencies of the Nissan LEAF (MY2018) combined with the eNovates DC V2G 10kW charger, with SoC ranges between 25% and 75% and the Renault ZOE with on-board AC/DC converter (prototype), with SoC range of 25% to 35%. Height of bars indicate the average of the tests; error bars indicate the minimum and maximum found efficiency within the tests.

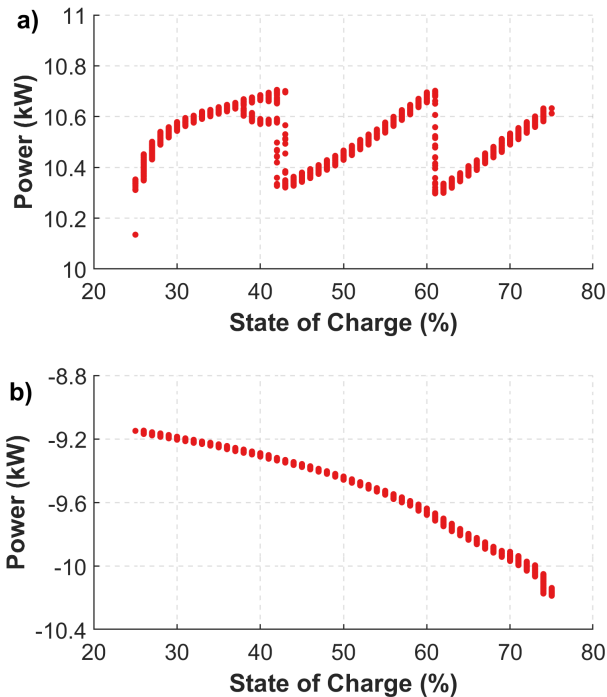


Fig. 7. State of Charge versus a) charging power and b) discharging (V2G) power of EV of three charging cycles at 3x16 Ampere of the Nissan LEAF between SoCs of 25% and 75%.

It should be noted that the experimental setup was a field experiment, which is both a strength and a weakness of the present study. The disadvantage of this setting is that it is impossible to make conclusive statements on the relation between independent and dependent variables. The advantage is that this setting resembles the natural environment of V2G, increasing the external validity of the tests.

Inaccuracies in measurements could occur from the communicated SoC by the EV battery. An important factor for the EV to determine its SoC is the voltage level in the battery system. However, the voltage in the battery can also be affected by different parameters, including the battery temperature and previous operation history [30]. Therefore, the same reported SoC does not necessarily represent the same energy level in the battery. By performing multiple charge and discharge cycles of a large SoC-range, the effect of this potential inaccuracy is minimized.

Our results have important practical implications. Since the efficiencies reported in this study are determined in a field experiment, results give a realistic estimation of V2G efficiencies in real-world applications. As mentioned before, efficiency is of large importance for the financial and environmental impact of battery operation in general, and V2G specifically [4], [5]. Aggregators could use the efficiency values obtained in this research to explore V2G business cases for EV users. Furthermore, the environmental impact of V2G can be determined more accurately.

V. CONCLUDING REMARKS

This study is the first to perform a broad field experiment on the round-trip efficiency of V2G. Furthermore, it provides a proof-of-concept of V2G using the AC/DC inverter on board of the EV. The results give guidance to EV modellers on appropriate efficiencies to assume in EV charging models and provide insight to e.g. charging fleet operators on the factors impacting the EV charging efficiency.

Future research could perform more sophisticated analyses on the V2G round-trip efficiency by performing more charge and discharge cycles and by considering different types of charging stations and EVs. In addition, future research should implement power flow meters behind the inverter to be able to separate V2G efficiency losses into battery losses and inverter losses. Also the range of experiments can be extended by testing other potential impacting factors, including different weather conditions and battery age.

REFERENCES

- [1] B. S. K. Patnam and N. M. Pindoriya, "DLMP Calculation and Congestion Minimization With EV Aggregator Loading in a Distribution Network Using Bilevel Program," *IEEE Systems Journal*, pp. 1–12, 2020.
- [2] N. Brinkel, W. Schram, T. AlSkaif, I. Lampropoulos, and W. van Sark, "Should we reinforce the grid? Cost and emission optimization of electric vehicle charging under different transformer limits," *Applied Energy*, vol. 276, no. October, 2020.
- [3] Utrecht University, "King launches network of charging stations to charge and discharge electrical cars," 2019.

- [4] Y. A. Shirazi and D. L. Sachs, "Comments on "Measurement of power loss during electric vehicle charging and discharging" – Notable findings for V2G economics," *Energy*, vol. 142, pp. 1139–1141, 2018.
- [5] W. L. Schram, T. Alskaf, I. Lampropoulos, S. Henein, and W. G. J. H. M. V. Sark, "On the trade-off between Environmental and Economic Objectives in Community Energy Storage Operational Optimization," *IEEE Transactions on Sustainable Energy*, 2020.
- [6] E. Apostolaki-Iosifidou, P. Codani, and W. Kempton, "Measurement of power loss during electric vehicle charging and discharging," *Energy*, vol. 127, pp. 730–742, 2017.
- [7] E. Apostolaki-Iosifidou, W. Kempton, and P. Codani, "Reply to Shirazi and Sachs comments on "Measurement of Power Loss During Electric Vehicle Charging and Discharging"," *Energy*, vol. 142, pp. 1142–1143, 2018.
- [8] C. Heymans, S. B. Walker, S. B. Young, and M. Fowler, "Economic analysis of second use electric vehicle batteries for residential energy storage and load-levelling," *Energy Policy*, vol. 71, pp. 22–30, 2014.
- [9] A. Whitehead, C. L. Smith, and J. M. Grace, "Vehicle-to-Grid Fleet Demonstration Prototype Assessment," Tech. Rep. June, Lincoln Laboratory, Massachusetts Institute of Technology, 2018.
- [10] C. Capasso and O. Veneri, "Experimental study of a DC charging station for full electric and plug in hybrid vehicles," *Applied Energy*, vol. 152, pp. 131–142, 2015.
- [11] A. Zecchino, A. Thingvad, P. B. Andersen, and M. Marinelli, "Suitability of Commercial V2G CHAdeMO Chargers for Grid Services Suitability of Commercial V2G CHAdeMO Chargers for Grid Services," in *EVS 31 & EVTeC 2018*, 2018.
- [12] A. Kiildsen, A. Thingvad, S. Martinenas, and T. M. Srensen, "Efficiency test method for electric vehicle chargers," *EVS 2016 - 29th International Electric Vehicle Symposium*, 2016.
- [13] P. Papadopoulos, S. Skarvelis-Kazakos, I. Grau, L. M. Cipcigan, and N. Jenkins, "Electric vehicles' impact on British distribution networks," *IET Electrical Systems in Transportation*, vol. 2, no. 3, pp. 91–102, 2012.
- [14] F. Safdarian, L. Lamonte, A. Kargarian, and M. Farasat, "Distributed optimization-based hourly coordination for V2G and G2V," *2019 IEEE Texas Power and Energy Conference, TPEC 2019*, pp. 1–6, 2019.
- [15] N. B. Brinkel, M. K. Gerritsma, T. A. AlSkaif, I. I. Lampropoulos, A. M. van Voorden, H. A. Fidder, and W. G. van Sark, "Impact of rapid PV fluctuations on power quality in the low-voltage grid and mitigation strategies using electric vehicles," *International Journal of Electrical Power and Energy Systems*, vol. 118, jun 2020.
- [16] Y. Shirazi, E. Carr, and L. Knapp, "A cost-benefit analysis of alternatively fueled buses with special considerations for V2G technology," *Energy Policy*, vol. 87, pp. 591–603, 2015.
- [17] Y. Huang, "Day-Ahead Optimal Control of PEV Battery Storage Devices Taking into Account the Voltage Regulation of the Residential Power Grid," *IEEE Transactions on Power Systems*, vol. 34, no. 6, pp. 4154–4167, 2019.
- [18] E. B. Iversen, J. M. Morales, and H. Madsen, "Optimal charging of an electric vehicle using a Markov decision process," *Applied Energy*, vol. 123, pp. 1–12, 2014.
- [19] M. van der Kam and W. van Sark, "Smart charging of electric vehicles with photovoltaic power and vehicle-to-grid technology in a microgrid; a case study," *Applied Energy*, vol. 152, pp. 20–30, 2015.
- [20] T. W. Hoogvliet, G. B. M. A. Litjens, and W. G. J. H. M. V. Sark, "Provision of regulating- and reserve power by electric vehicle owners in the Dutch market," *Applied Energy*, vol. 190, pp. 1008–1019, 2017.
- [21] S. Faddel, A. Aldeek, A. T. Al-Awami, E. Sortomme, and Z. Al-Hamouz, "Ancillary Services Bidding for Uncertain Bidirectional V2G Using Fuzzy Linear Programming," *Energy*, vol. 160, pp. 986–995, 2018.
- [22] G. M. Freeman, T. E. Drennen, and A. D. White, "Can parked cars and carbon taxes create a profit? The economics of vehicle-to-grid energy storage for peak reduction," *Energy Policy*, vol. 106, no. March, pp. 183–190, 2017.
- [23] A. Zakariazadeh, S. Jadid, and P. Siano, "Multi-objective scheduling of electric vehicles in smart distribution system," *Energy Conversion and Management*, vol. 79, pp. 43–53, 2014.
- [24] G. Chandra Mouli, P. Bauer, and M. Zeman, "System design for a solar powered electric vehicle charging station for workplaces," *Applied Energy*, vol. 168, pp. 434–443, 2016.
- [25] A. Triviño-Cabrera, J. A. Aguado, and S. de la Torre, "Joint routing and scheduling for electric vehicles in smart grids with V2G," *Energy*, vol. 175, pp. 113–122, 2019.
- [26] L. Agarwal, W. Peng, and L. Goel, "Using EV battery packs for vehicle-to-grid applications: An economic analysis," *2014 IEEE Innovative Smart Grid Technologies - Asia, ISGT ASIA 2014*, pp. 663–668, 2014.
- [27] X. Han, H. Zhang, X. Yu, and L. Wang, "Economic evaluation of grid-connected micro-grid system with photovoltaic and energy storage under different investment and financing models," *Applied Energy*, vol. 184, pp. 103–118, 2016.
- [28] J. Lindgren and P. D. Lund, "Effect of extreme temperatures on battery charging and performance of electric vehicles," *Journal of Power Sources*, vol. 328, pp. 37–45, 2016.
- [29] G. Liu, M. Ouyang, L. Lu, J. Li, and X. Han, "Analysis of the heat generation of lithium-ion battery during charging and discharging considering different influencing factors," *Journal of Thermal Analysis and Calorimetry*, vol. 116, no. 2, pp. 1001–1010, 2014.
- [30] J. B. Gerschler and D. U. Sauer, "Investigation of open-circuit-voltage behaviour of lithium-ion batteries with various cathode materials under special consideration of voltage equalisation phenomena," *24th International Battery, Hybrid and Fuel Cell Electric Vehicle Symposium and Exhibition 2009, EVS 24*, vol. 3, no. January, pp. 1550–1563, 2009.